

The global leader in
door opening solutions



Crawford 242 Overhead sectional door

Copyright and Disclaimer Notice

Although the contents of this publication have been compiled with the greatest possible care, ASSA ABLOY Entrance Systems cannot accept liability for any damage that might arise from errors or omissions in this publication. We also reserve the right to make appropriate technical modifications/replacements without prior notice.

No rights can be derived from the contents of this document.

Color guides: Color differences may occur due to different printing and publication methods.

ASSA ABLOY, Crawford, Megadoor and hafa, as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies within the ASSA ABLOY Group.

Copyright © ASSA ABLOY Entrance Systems 2006-2013.

No part of this publication may be copied or published by means of scanning, printing, photocopying, microfilm or any other process whatsoever without prior permission in writing by ASSA ABLOY Entrance Systems.

All rights reserved.



Technical facts

Features

Max size: (W x H)*	7250 x 6050 mm
Frame thickness:	44 mm
Frame material:	Aluminium tubular frames
Filling:	Windows or insulated sandwich panels or infills
Color outside:	Natural aluminium
Color inside:	Natural aluminium
Track types:	Standard: SL Optional: HL, LL, VL
Windows:	Optional: DAS, DSS, DAD, DSD, TAD, TSD, SA3, SS3, SH4
Passdoor:	Optional: In door leaf or in side section
Electrical operation:	Optional: Automated operation, Access control, Safety functions

* On request available up to 9000 x 6050 mm

Performance

Opening/closing speed:	CDM9: 0,25 m/s CDM9 HD: 0,18 m/s CDM9 2H: opening 0,5 m/s, closing 0,25 m/s
Life time expectations:	Door: 100.000 door cycles Springs: 20.000 door cycles
Wind load, EN12424**	Class 3 (\leq 4250 mm DLW) Class 2 ($>$ 4250 mm DLW)
Thermal transmittance, EN12428	1,3 W/(m ² .k) TAD/TSD 3,3 W/(m ² .k) DAS/DSS/DAD/DSD 4,9 W/(m ² .k) SA3/SS3/SH4 (4000 x 4000 mm)
Water penetration, EN12425	Class 3 (4000 x 4000 mm)
Air permeability, EN12426	Class 2 (4000 x 4000 mm + passdoor)

** Higher wind load classification on request

Contents

Copyright and Disclaimer Notice	2
Technical facts	3
Contents	4
1. Description	6
1.1 General	6
1.1.1 Standard	6
1.1.2 Options	6
1.2 Door leaf	7
1.2.1 Construction	7
1.2.2 Material	7
1.2.3 Colors	7
1.2.4 Seals	7
1.2.5 Wind reinforcement truss	8
1.2.6 Handle	8
1.2.7 Locks	8
1.2.8 Windows	9
1.2.9 Fixed sections	10
1.2.10 Passdoor with 180 mm threshold	11
1.2.11 Passdoor with low threshold	12
1.3 Track sets	13
1.3.1 General	13
1.3.2 Standard lift	13
1.3.3 High lift	13
1.3.4 Low lift	14
1.3.5 Vertical lift	14
1.3.6 Special track sets	14
1.4 Balancing system	15
1.4.1 Safety devices	15
1.5 Operating system	16
1.5.1 Types of operation	16
1.5.2 CDM9 Operator - 900 Door control systems	17
1.5.3 Access and automation	19
1.6 Monitoring systems	22
1.6.1 Saving energy	22
1.6.2 Security enhancement	22
1.6.3 Dock management	22
1.6.4 Facility management	22



2.	Specifications	23
2.1	Dimensions.....	23
2.1.1	Daylight width and daylight height.....	23
2.1.2	Section sizes	23
2.1.3	Vertical cross-section.....	23
2.2	Windows and passdoor.....	24
2.2.1	Number of windows.....	24
2.2.2	Passdoor 180 mm threshold	24
2.2.3	Passdoor low threshold.....	25
2.3	Door operation	25
2.3.1	Selection guidelines for operation type.....	25
2.3.2	Selection guidelines for Door operator.....	26
2.3.3	900 Door control systems - Selection guidelines.....	26
2.3.4	900 Door control systems - Selection guidelines for automation	27
3.	CEN Performance	28
3.1	Lifetime expectation	28
3.2	Resistance to windload	28
3.3	Resistance to water penetration.....	28
3.4	Air permeability	28
3.5	Thermal transmittance.....	29
3.6	Operating forces and safe openings.....	29
4.	Building and space requirements	30
4.1	Building preparations	30
4.1.1	Installation preparations.....	30
4.1.2	Electrical preparations	30
4.2	Space requirements	30
4.2.1	Space requirements SL	31
4.2.2	Space requirements SLL.....	32
4.2.3	Space requirements HL	33
4.2.4	Space requirements LL	34
4.2.5	Space requirements VL.....	35
4.2.6	Space requirements Door operators.....	36
5.	Service	37
	Index	38

1. Description

1.1 General


The Crawford 242 overhead sectional door is one of the most stable overhead doors on the market.

It is an overhead sectional door, suitable for all types of buildings, with regard to both function and appearance. High flexibility makes it possible to install this door in almost every type of building.

The door slides up under the roof when opened, allowing free space around the door opening and leaving the door opening completely free.

The door is made of aluminium tubular profiles, filled with sandwich panels or acrylic windows. The high light admission makes this door the ideal choice for working environments that require maximum lighting.

The Crawford 242 overhead sectional door has been designed to meet all operational and safety requirements in the European Directives and the standards issued by the European Standardization Committee, CEN.

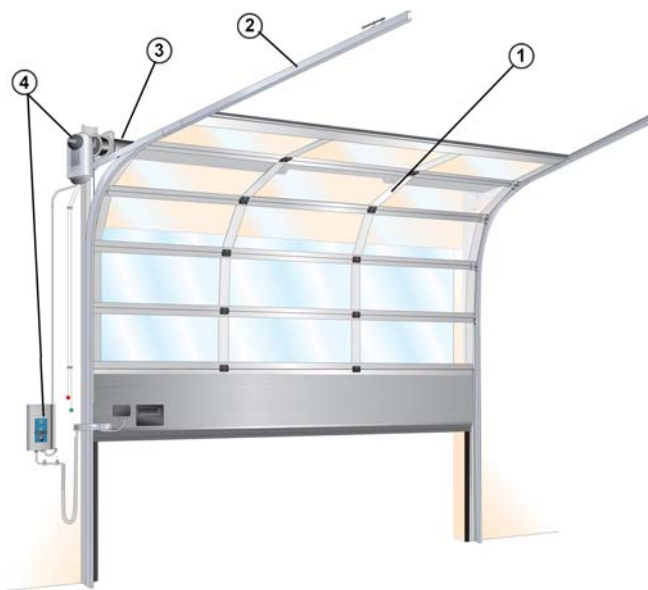

The door has 4 primary parts:

- 1) Door leaf
- 2) Track set
- 3) Balancing system
- 4) Operating system/chainhoist (optional)

1.1.1 Standard

Although every Crawford door is custom built, the Crawford 242 overhead sectional door is supplied with the following specifications as standard:

Door leaf:	Aluminium frames with infills or windows
Locks:	Lock bolt with lock hole protection
Colors:	Natural aluminium
Track type:	SL: Standard Lift
Operation	Pull down rope and step/lifting handle
Safety:	SBD: Spring Break Device

1.1.2 Options

Crawford provides a wide range of options and accessories to customise the Crawford 242 overhead sectional door to any customer's needs.

Top panel:	280 mm up to 704 mm
Passdoor:	In door leaf or in side section
Windows:	DAS/DSS: Double glazed Acrylic Single sealed DAD/DSD: Double glazed Acrylic Double sealed TAD/DSD: Triple glazed Acrylic Double sealed SA3: Single glazed Acrylic pane 2,8 mm SS3: Single glazed Acrylic pane 2,8 mm SH4: Single glazed Hardened pane 4 mm
Infills:	FA: Aluminium sheets, mill finished. Stucco embossed outside and inside.
Locks:	Cylinder lock
Painting:	8 Pre-coated colours Factory painting - all RAL colors
Fixed sections:	Top and side sections
Track types:	HL: High Lift LL: Low Lift VL: Vertical Lift
Operation:	D hoist T hoist U hoist CDM9 Operator CDM9 HD Operator CDM9 2H Operator
Safety:	CBD: Cable Break Device

1.2 Door leaf

1.2.1 Construction

The Crawford 242 overhead sectional door leaf has horizontal sections, connected together with hinges. The outer hinges of each section have rollers that run in the tracks.

The horizontal sections are aluminium tubular frames with full windows or sandwich infills.



1.2.2 Material

The sections are made of tubular aluminium frames, equipped with windows or insulated sandwich infills.

The bottom section is a frame construction with insulated sandwich infills or windows, but can, if required, be delivered as an insulated steel panel.

1.2.3 Colors

The Crawford 242 overhead sectional door is available in any color on request. As standard, the frames are delivered in natural anodized aluminium.

1.2.3.1 Standard colors

Frames

- The frames are delivered as a standard in natural aluminium

Infills

- The infills are delivered as a standard in natural aluminium

Bottom section

- Outside color:
 - Standard frame section: Natural aluminium
 - Optional panel section: Available in the 9 standard pre-coated colours RAL 1021, 3002, 5010, 6005, 7016, 9002, 9006, 9007, 9010.
- Inside color: RAL 9002 - Gray white

1.2.3.2 Optional colors *

Frames

- 9 pre-coated colors RAL 1021, 3002, 5010, 6005, 7016, 9002, 9006, 9007, 9010.
- Factory painting, all RAL colors

Infills

- 9 pre-coated colors RAL 1021, 3002, 5010, 6005, 7016, 9002, 9006, 9007, 9010.
- Factory painting, all RAL colors

Bottom section

- Factory painting, RAL colors, outside only
- * Other colors available on request

1.2.4 Seals

The door is equipped with well designed sealings on all sides which gives the door its excellent sealing abilities.

1.2.4.1 Top seal

Installed on the top panel, to seal the gap between the panel and the wall. The flexible rubber material provides continuous pressure on the top wall, ensuring maximum sealing.





1.2.4.2 Side seal

Installed on the track set to close the gap between the tracks and the door leaf. The flexible rubber material provides continuous pressure on the door leaf, while dodging irregularities, ensuring maximum sealing.



1.2.4.3 Bottom seal

Installed on the bottom edge of the bottom panel, to act as a barrier as well as a shock absorber. The flexible rubber material and the O-shape provides continuous pressure on the floor, ensuring maximum sealing.



1.2.5 Wind reinforcement truss

Wider door panels and panels with windows are reinforced with metal profiles that act as trusses. These trusses reduce bending of the panel caused by wind loads or when the door leaf is in the horizontal position and is bending under its own weight. The wind reinforcement truss is integrated in the aluminium profiles.

1.2.6 Handle

For manual operation, every Crawford 242 overhead sectional door is provided with a solid, easy to grip and step-on handle, finished with the Crawford logo.



1.2.7 Locks

1.2.7.1 Lock bolt

A standard Crawford 242 overhead sectional door is equipped with a Lock bolt.

The Lock bolt locks the door from the inside, without the use of a key.



1.2.7.2 Cylinder lock

The Cylinder lock is a key operated lock which offers extra security. The lock is installed on the inside and can be unlocked with a key and turning the handle. Access to the Cylinder lock is possible from either only the inside, or both the inside and the outside.




1.2.8 Windows

The frame construction allows full windows in all sections. The light opening is equal for all window types and depends on the dimensions of the door leaf.

1.2.8.1 DAS / DSS

DAS: Double glazed "scratch resistant" Acrylic (SAN with coating), Single sealed

DSS: Double glazed Acrylic (SAN), Single sealed

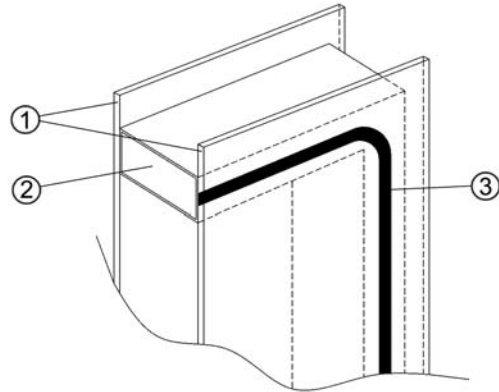

1) 2,8 mm SAN acrylic sheet (with or without coating)


2) Aluminium distance frame

3) Butyl sealing

1.2.8.2 DAD / DSD

DAD: Double glazed "scratch resistant" Acrylic (SAN with coating), Double sealed

DSD: Double glazed Acrylic (SAN), Double sealed

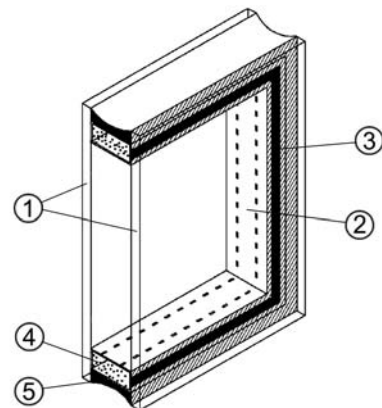

1) 2,8 mm SAN acrylic sheet (with or without coating)

2) Aluminium distance frame

3) Butyl sealing

4) Absorbing siccative

5) Silicone sealing



1.2.8.3 TAD / TSD

TAD: Triple glazed, double sealed, 3 x 2,8mm, outer & inner sheet SAN scratch-resistance coating.

TSD: Triple glazed, double sealed, 3 x 2,8mm, SAN (without scratch-resistance coating).



1.2.8.4 SA3 / SS3 / SH4



- SA3: Single pane of "scratch resistant" Acrylic (SAN with coating) 2,8 mm
- SS3: Single pane of Acrylic (SAN) 2,8 mm
- SH4: Single hardened glass 4 mm

1.2.9 Fixed sections

Fixed sections can advantageously fill space around new doors that are smaller than the wall opening. Fixed sections are available in top and side sections. Fixed sections are supplied in the same color and construction as the door leaf.

A fixed section can be provided with a passdoor for two reasons: Safety and energy cost reduction.


- Safety: Putting a separate passdoor in a fixed section next to the industrial door separates pedestrian and vehicle traffic.

Energy cost reduction: The opening space for frequent pedestrian traffic is minimized.



1.2.10 Passdoor with 180 mm threshold

The standard 180 mm is designed to be combined with virtually all options of the door. It is not applicable as an emergency exit, as its threshold of 180 mm is too high. The passdoor is designed with a push/pull grip which ensures an easy and simple opening and closing of the passdoor.

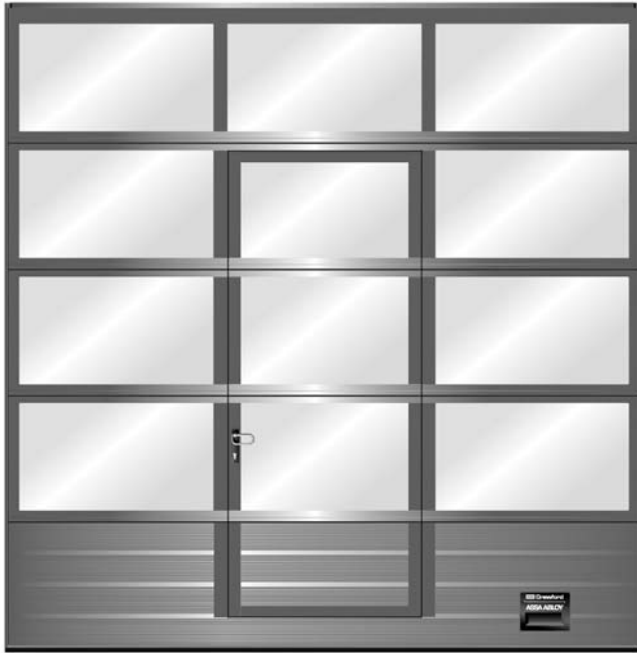


Construction


This passdoor is constructed with a 542 bottom section and bottom seal. A reinforcement truss on the bottom section is required to maintain the door's sturdiness and resistance to wind load.

At passdoor

Beside passdoor

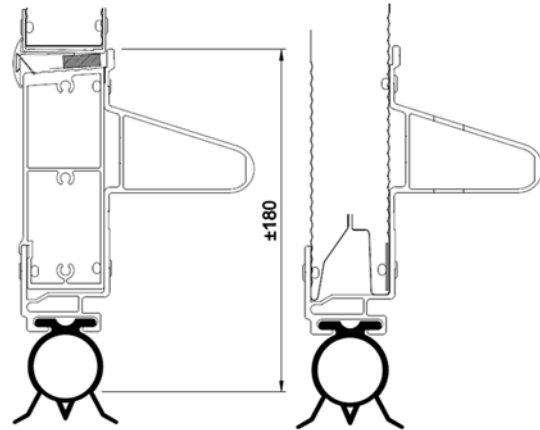

Outside view of threshold



Features:

- Always opening outwards, min. 90 degrees opening
- Hinged left or right
- Seals in passdoor frame reduce air permeability.
- Integrated passdoor switch if electrically operated
- Ring shaped door handle
- All commonly used cylinder locks are available: Euro, Kaba, Assa-Abloy. Standard : Euro cylinder lock
- Door closer type M.A.B.
- Panic lock NEMEF/CISA (option).



1.2.11 Passdoor with low threshold

The passdoor with low threshold is designed to optimise comfortable pedestrian passing and minimises the risk of tripping. In addition, with the sturdy design of the bottom profile it is not required to strengthen the door leaf with a bottom reinforcement truss. The passdoor is designed with a push/pull grip which ensures an easy and simple opening and closing of the passdoor.




Construction


This passdoor is designed with a 542 bottom section with a sturdy and wide aluminium profile. This profile is ribbed, minimising the risk of slipping when there is rain or snow on the floor or on the profile.

At passdoor

Beside passdoor

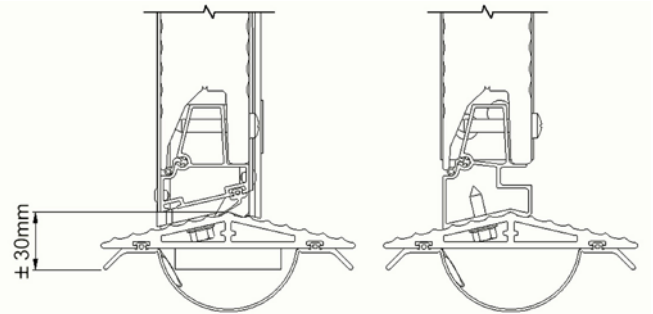

Outside view of threshold



Types of operation

The low threshold passdoor is available for all types of operation. In case of impulse-down button operation, a special CDM9 with 950 control unit is required with a light curtain in the tracks that detect persons or objects in the door opening when the door closes.

Features:

- Always opening outwards, min. 90 degrees opening
- Hinged left or right
- Seals in passdoor frame reduce air permeability.
- Integrated passdoor switch if electrically operated
- Ring shaped door handle
- All commonly used cylinder locks are available: Euro, Kaba, Assa-Abloy. Standard : Euro cylinder lock
- Door closer type M.A.B.
- Panic lock NEMEF/CISA (option).

1.3 Track sets


1.3.1 General

The track set supports the door leaf on its rollers and guides it upwards. The selection of the appropriate track set is based on various factors:

- Available head room
- Door height
- Type of vehicles
- Presence of roof obstructions, pipes and overhead crane beams.

The track sets below cover most applications. Other applications are available on request.


1.3.2 Standard lift

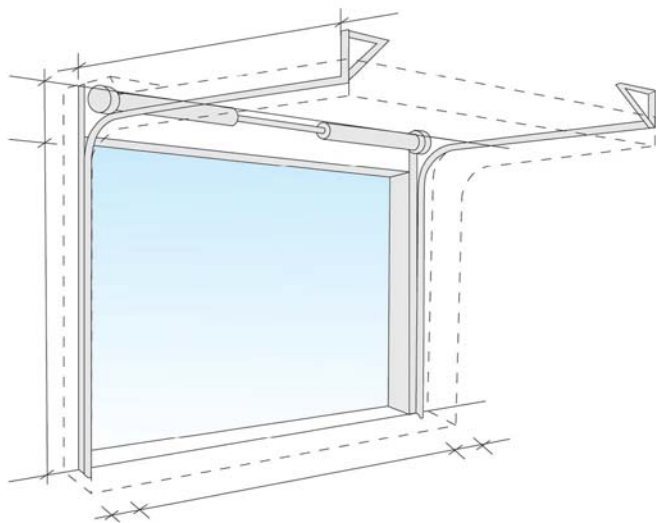

- Building type: Most standard industrial buildings.
- Benefits: Optimal design for common buildings.

The Standard Lift track set, with the spring package just above the door, is the most common solution

1.3.3 High lift

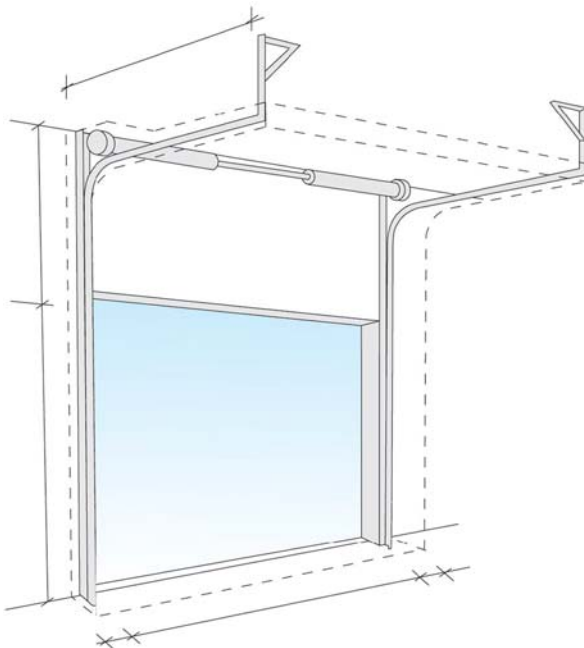


- Building type: High ceilings. On the High Lift track set the spring package is placed high above the door.
- Benefits: This track type allows high vehicles to cross along the door opening without obstructions of the horizontal tracks.

This track type is used when the space above the door is considerable, and is needed for work and traffic, e.g.: high vehicles.




1.3.4 Low lift

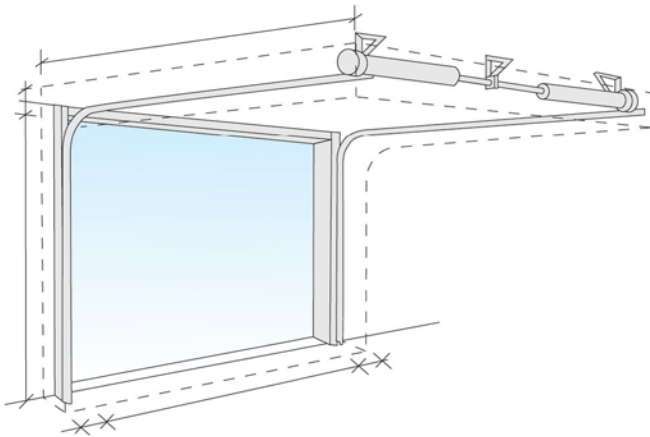

- Building type: Low ceilings.
- Benefits: Achieve maximum daylight height with minimum head room.

Same as standard lift, but with the spring package at the end of the horizontal tracks. The space between the door opening and the roof does not need to be more than 265 mm.

1.3.5 Vertical lift

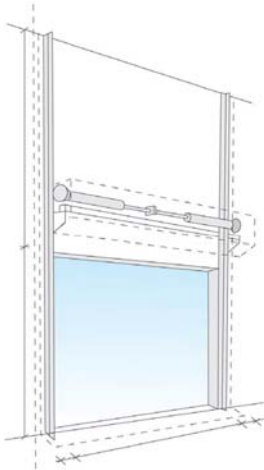


- Building type: Very high ceiling and high working space requirements.
- Benefits: Allows high vehicles to cross along the door opening without any obstructions.

If the space between the daylight height and the roof is sufficient, with this track type, the door can be opened vertically.

1.3.6 Special track sets

The Crawford 242 overhead sectional door track set can be custom designed to make the door fit in places that seem quite impossible. Our door technicians can solve installation problems where the door must share space with ventilation systems, crane beams, etc. For example:

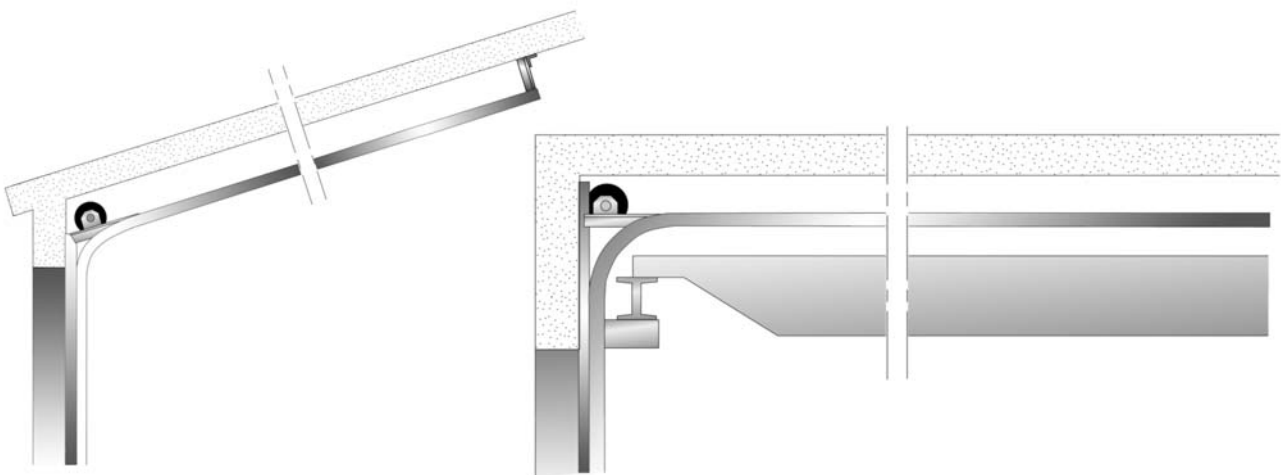

1.4 Balancing system

The balancing system balances the door by applying a force nearly equal to the weight of the door leaf. This allows the door leaf to be moved up and down manually, and to stay open in any position.

The system is installed on the top or the end of the track set and works as follows: Two torsion springs are installed on a shaft above the door opening. This shaft has a cable drum on each end from which door cables run to the bottom corners of the door leaf. Turning the shaft lifts the door up or down.

1.4.1 Safety devices


The balancing system supports heavy forces. In case of a spring or cable break, its counterforce is lost. The door is therefore equipped with two safety devices that can block downward door movement:

- Spring Break Device (standard)
- Cable Break Device (optional)

1.4.1.1 Spring break device (SBD)

The Spring Break Device (SBD) is delivered with all Crawford 242 overhead sectional doors.

In the event of a spring break, the sudden drop force activates the Spring Break Device (SBD). The shaft will be locked in less than 300mm of door movement.

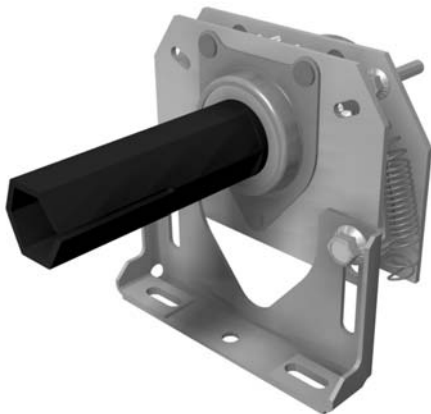

1.4.1.2 Cable break device (CBD)

The Cable Break Device (CBD) is an optional safety device. In the event of a spring failure in the door balancing system the door leaf will be brought to rest after a drop of less than 300mm.





1.5 Operating system

1.5.1 Types of operation

The Crawford 242 overhead sectional door can be opened and closed manually. They are also prepared for electrical operation. Electrically operated doors can be controlled by hand or be fully automatic. Traffic frequency, climate requirements and the weight of the door play a key role in choosing the optimal control system.

1.5.1.1 Pull-down rope

The Crawford 242 overhead sectional door can be operated manually with a pull-down rope. The pull-down rope is directly connected to the door leaf.



1.5.1.2 Chain hoist


For heavier doors, a chain hoist allows easier door operation. There are three types of chain hoist:

- D-hoist: Non-g geared chain transmission directly connected to the shaft. Recommended for doors up to 250 kg (For hexagonal shaft only).
- T-hoist: Geared (ratio 1:4) chain transmission directly connected to the shaft. Recommended for doors up to 250 kg (For all shaft types).
- U-hoist: Geared (ratio 1:3) indirect chain transmission. Recommended for doors of 250 kg and above (For all shaft types).

D-hoist:



T-hoist:



U-hoist:



1.5.1.3 Electrical operation

The Crawford 242 overhead sectional door can be supplied or upgraded with an electrical operating system. Electrical operation gives access to the full program of Access and Automation functions, that can fulfill many operational needs, related to traffic type and frequency, door weight and temperature control.



1.5.2.1 CDM9 Operator


One main part of the system is the operator: an electric motor which drives the balancing shaft with the cable drums and torsion springs. It can be retrofitted to an already installed door. The CDM9 operator is mounted directly on the balancing shaft and does not require any special wall reinforcement.

Key features:

- Smooth and silent
- Soft start and stop
- Fits all track types and shafts
- Life time: 84.000 - 300.000 door cycles (depending on weight and temp.) e.g.:
 - temp. 0 °C - +40 °C/weight 250 kg = 300.000 cycles
 - temp. -20 °C - +60 °C/weight 400 kg = 84.000 cycles

1.5.2 CDM9 Operator - 900 Door control systems

The CDM9 operator is a combination of the CDM9 operator and a 900-series Door control system. The regular CDM9 model is available for doors up to 400 kg. The CDM9 HD model is available for doors up to 650 kg. The double speed CDM9 2H model is available for doors up to 250 kg.

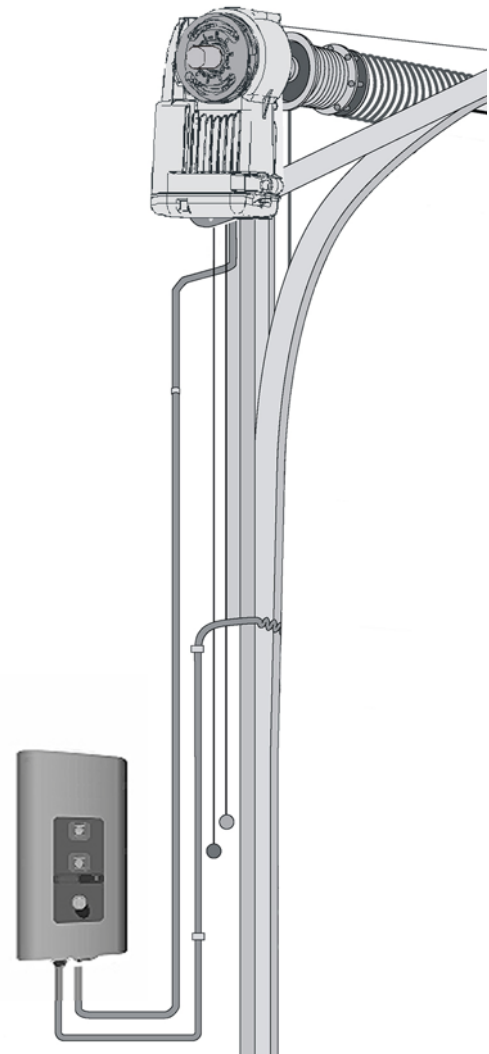



1.5.2.2 900 Door control systems

General

The 900 Door control system series provides a range of control units, from basic up, stop and down buttons to advanced automated control.

The design of all control units is based on modules, and it is possible to upgrade or downgrade safety or automation functions. Additional kits such as magnetic loop, photocells, radar, radio and reduced door opening are available.

920 Door control system

The 920 Door control system is the basic control unit that has the necessary hold-to-run or impulse open, hold-to-run close and stop functions and a slot for an external control box.

This control unit is the economical solution for working environments where the door opening frequency is low.



950 Door control system

The 950 Door control system is the most advanced control unit that is prepared for one or more physical upgrades from the entire range of automation systems. An automation system allows door operation by sensors or remote control.

This control unit contains a 3-digit diagnostics display that allows efficient troubleshooting and displays the number of door cycles. Together with the service indicator, this extra feature allows advanced maintenance planning to users where the door is an essential element of internal logistics.



930 Door control system

The 930 Door control system is a basic control unit that has impulse up and down functions with supervised safety edge. An extra set of upgrade features, such as external control, that can be installed during or after installation, is available.

This control unit is the more advanced solution for door openings that are frequently used by pedestrians and forklift trucks, because of its automated opening and closing function.



1.5.3 Access and automation

Crawford offers a wide range of functions that allows advanced opening and safety control. Please refer to the specification sheet of the control units to see which functions apply to which models.


1.5.3.1 Basic control functions

Interlocking



Developed for climate control or safety; If door A is open, door B cannot be opened. If door B is open, door A cannot be opened. An interlocked door can remember an up-command, if selected via a micro switch.


Reduced opening



When it is unnecessary or undesirable to fully open a door, an additional switch can be used to open the door to a pre-programmed reduced opening position.


1.5.3.2 External control functions

External push button box



An extra control box is installed outside the building or inside close to the door if the main control unit needs to be installed away from the door opening. Installed on the inside or outside wall beside the door.

Pull-rope switch



A pull-rope switch above the door opening can be operated from e.g. a forklift truck. Pulling the rope opens a closed door or closes an opened door. Installed on the inside construction above the door.

Remote control




A hand-held radio transmitter allows door operation from a vehicle or any position within 50-100 meters from the receiver and aerial at the door. For closing, the door can be provided with a photocell beam. Receiver installed in control unit, antenna installed on the wall beside the door.




1.5.3.3 Automatic control functions

Magnetic loop




A sensor in the floor detects a metal object (usually forklift trucks, pallet trucks) and opens the door automatically. This is an ideal solution for frequent vehicle traffic.
Installed on the outside, inside or both sides of the door in the floor.

Radar




An infrared sensor above the door detects an object (person, vehicle) within a specified distance from the door and opens the door automatically. This is an ideal solution for frequent vehicle or personal traffic. Often combined with automatic closing.
Installed on the inside or outside wall above the door.

Photocell open door



A set of photocells on pillars, on each side of the door. When a person or vehicle passes between the photocells, the beam is interrupted and the door opens. Photocells installed on pillars, away from the door.


Automatic closing



A programmable timer that closes the door after a specified time, counted from either the fully open position and/or from passing through the photocell beam. Adjustable micro switches in control unit.


1.5.3.4 Safety functions

Safety edge




As a standard, all doors that have the impulse-close function or any form of automated closing, are equipped with a safety edge. The pneumatic sensor in the bottom seal detects any obstruction under a closing door and reverses the door.
Installed in the bottom seal.

Safety photocells 1-channel




A set of a photocell transmitter and receiver is installed in the door opening. If the photocell beam is interrupted during closing, the door will stop in less than 30mm and reverse to the fully open position.
Installed in the door opening.

Safety photocells 2-channel




Two sets of photocell transmitter and receiver are installed in the door opening. If one or both photocell beams are interrupted during closing, the door will stop in less than 30mm and reverse to the fully open position.
Installed in the door opening.

Warning lights - Red




Two red warning lights giving information on the current door behaviour. Flashing light before or during door movement. Optional: Continuous light before and during door movement.
Installed on the inside and outside wall beside the door.

Warning lights - Green



One or two green warning lights indicating the open position of the door by continuous light signal.
Installed on the inside and/or outside wall beside the door.

Traffic lights - Red & Green



If traffic through a door needs to be directed; two red and two green traffic lights can be installed to indicate traffic direction. From the side where a vehicle is first detected to approach the door, the green traffic light comes on. The opposing side shows a red traffic light. Traffic from this direction must give way to the other. Usually installed in e.g. parking garages.
Installed on the inside and outside wall beside the door.

1.5.3.5 Additional functions

UPS battery backup



When mains failure cannot be permitted or an increased risk of mains failure is predicted, the UPS battery backup system can be installed to store enough energy for 10 door cycles.
Installed on the inside wall beside the door.

Relay box



A sealed connection box makes it possible to safely connect external high-voltage equipment.



1.6 Monitoring systems

As an option on all our products, a Crawford Monitoring System can be installed. This system helps to ensure efficiency and security in daily operations. All doors or docking stations are connected to the Monitoring System's server, which gives the opportunity to supervise, monitor and report a wide variety of aspects in a facility.



1.6.1 Saving energy

A monitoring system reduces energy costs and contributes to a better environment. Energy is lost every time a door is open. If a door is open when no truck is at the bay, even more energy is lost.

A Crawford Monitoring System automatically ensures that no door will open unless there is a truck at the bay and even set it to close when there an activity is delayed.

1.6.2 Security enhancement

Closing and locking doors is an obvious daily routine. However, checking this manually can be time consuming in a busy facility.

A Crawford Monitoring System can automatically ensure that all doors are closed and locked when they need to be. It can also activate all doors and locks from its remote location, and give a real-time overview of the building's situation.

1.6.3 Dock management

A good way to increase throughput and thereby efficiency at a logistics facility is to reduce the time of having no truck – or the wrong truck – at a loading bay.

A Crawford Monitoring System makes visible – in real-time – which bays are occupied or free, and for how long. It makes it possible to reserve bays for docking activities and to inform drivers via SMS. Since it incorporates information from cameras and other inputs (RFID, card readers, etc.), the system stays updated in real-time.

1.6.4 Facility management

The Crawford Monitoring System gives a real-time service status for all your door and docking equipment. If an error code occurs, the Crawford service organisation is automatically notified, and will respond quickly. Other maintenance information can easily be integrated, further reducing the overall costs.

2. Specifications

2.1 Dimensions

2.1.1 Daylight width and daylight height

The standard Crawford 242 overhead sectional door is delivered in the following size range:

Standard door sizes

	Daylight width	Daylight height
Min.:	2050 mm	2100 mm
Max.:	7250 mm	6050 mm

Other sizes may be available on request.

2.1.2 Section sizes


Section height:	450 - 704 mm*
Thickness:	44 mm

*The door leaf height is equally divided over the sections (standard).

Number of sections

DLH Frame bottom section	Number of sections
0000 – 2296	3
2297 – 3000	4
3001 – 3704	5
3705 – 4408	6
4409 – 5112	7
5113 – 5816	8
5817 – 6050	9
DLH Panel bottom section	Number of sections
0000 – 2127	3
2128 – 2831	4
2832 – 3535	5
3536 – 4239	6
4240 – 4943	7
4944 – 5647	8
5648 – 6050	9

2.1.3 Vertical cross-section

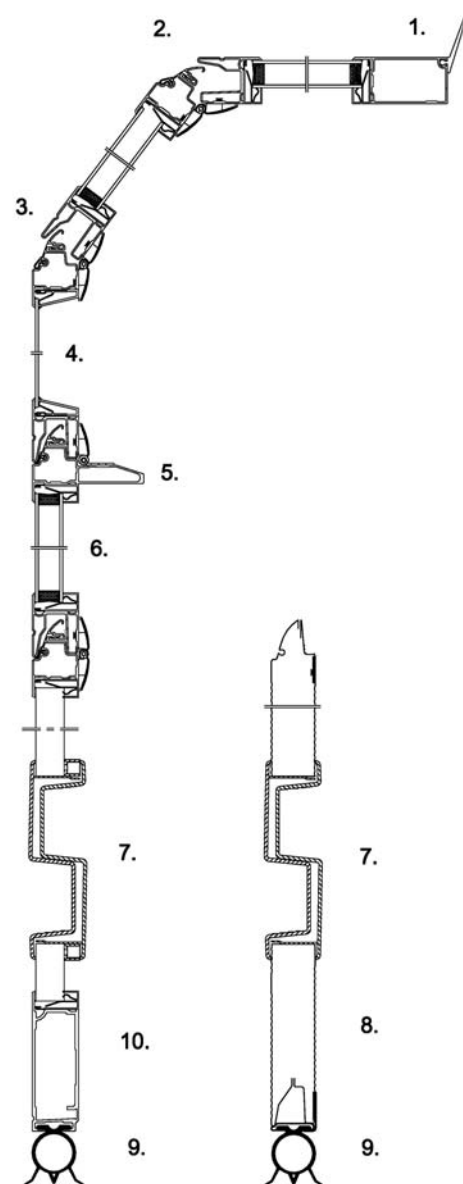

- 1) Top seal
- 2) Integrated finger pinch protection
- 3) Sealing in section joint
- 4) Single acrylic glass 3mm or hardened 4 mm section
- 5) Panel truss - wind reinforcement (if necessary)
- 6) Double glass, 27mm
- 7) Handle
- 8) Panel bottom section
- 9) Bottom seal
- 10) Frame bottom section



2.2 Windows and passdoor

2.2.1 Number of windows

For windows and passdoors, the daylight width is divided into a fixed grid. The number of windows depends on the daylight width of the door.

Daylight width	No. of windows
2050 - 3050 mm	2
3051 - 4550 mm	3
4551 - 6050 mm	4
6051 - 7250 mm	5

2.2.2 Passdoor 180 mm threshold

Passdoor opening sizes

Width:	810 mm (option 750-1000)
Height from floor level:	2050 mm (variable)

Place of passdoor


Daylight width	Window no.
2050 - 4050 mm	2 (centre)
4051 - 5050 mm	2 or 3
5051 - 6050 mm	2, 3 or 4
6051 - 7250 mm	2, 3,4 or 5

Permissible overhead door sizes

Minimum permissible DLW	2050 mm
Minimum permissible DLH	2215 mm
Maximum permissible DLW	7250 mm
Maximum permissible DLH	6050 mm

Specifications

Threshold height:	190 mm incl. bottom seal
Lockbox:	Standard
Cylinder:	Market oriented
Door closer:	MAB or equal

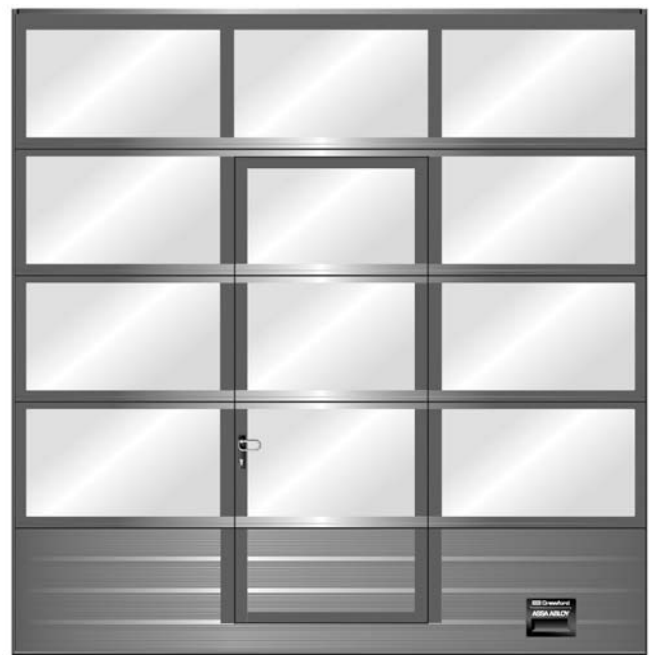

2.2.3 Passdoor low threshold

Passdoor opening sizes

Width:	810 mm
Height from floor level:	2050 mm

Position of passdoor

Daylight width	Window no.
2050 - 4050 mm	2
4051 - 5050 mm	2 or 3
5051 - 5500 mm	2,3 or 4

Permissible overhead door sizes

Minimum permissible DLW	2050 mm
Maximum permissible DLW	5500 mm

Minimum permissible DLH (if operated manually or with hold-to-run down button)	2215 mm								
Minimum permissible DLH (if operated with impulse down button)	<table border="0"> <tr> <td>Standard Lift</td> <td>2620 mm</td> </tr> <tr> <td>High Lift (DLH+HL)</td> <td>2800 mm</td> </tr> <tr> <td>Low Lift (CLH)</td> <td>2705 mm</td> </tr> <tr> <td>Vertical Lift</td> <td>No limit</td> </tr> </table>	Standard Lift	2620 mm	High Lift (DLH+HL)	2800 mm	Low Lift (CLH)	2705 mm	Vertical Lift	No limit
Standard Lift	2620 mm								
High Lift (DLH+HL)	2800 mm								
Low Lift (CLH)	2705 mm								
Vertical Lift	No limit								
Maximum permissible DLH	6050 mm								

Other limitations

- If the door is electrically operated with impulse-close or automatic closing, a specific CDM9 with 950 operator is required in combination with a light curtain in the tracks.
- Only possible with a 542 bottom section.

Specifications

Threshold height:	30 mm incl. bottom seal
Lock:	Depends on market
Door closer:	MAB or equal

2.3 Door operation

2.3.1 Selection guidelines for operation type


Door size m ²	Openings / day			
	1-5/day	5-10/day	10-15/day	>25/day
0 - 10	□ / ■	□ / ■	■ / ■	■ / ■
10 - 20	□ / ■	■	■ / ■	■ / ■
> 20 - 42	■	■	■ / ■	■ / ■
> 42*	■	■	■ / ■	■ / ■

□ Manual operation

■ Electrical operation

■ Automated operation

2.3.2 Selection guidelines for Door operator

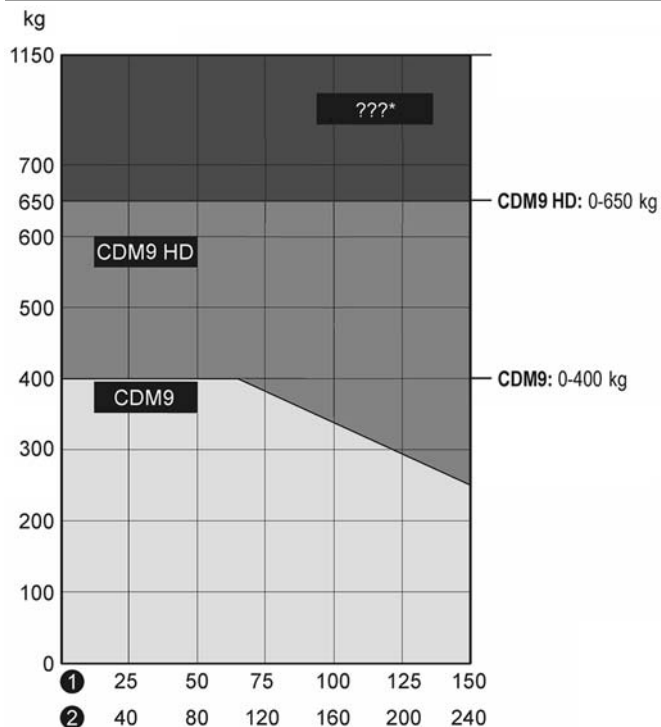

Door openings/day

- 1. Over 300 days/year
- 2. Over 220 days/year
- * On request

2.3.3 900 Door control systems - Selection guidelines

Functions included	920	930	950
Open (by impulse)	■	■	■
Open (hold to run)			
Stop	■	■	■
Close (by impulse)		■	■
Close (hold to run)	■		
Safety edge		■	■
Open function		■	■
One button function			■
Display (diagnostics)			■
Service indicator			■



- Standard
- Option / Available


2.3.4 900 Door control systems - Selection guidelines for automation

The “Automation D-kits” are packages of common combinations. These kits can also be supplemented by “additions to D-kits”.

Automation D-kits	D1	D2	D3	D4	D5	D6	D7
Interlocking	■	■	■	■	■	■	■
Magnetic loop		■		■		■	
Traffic lights - Green + Red					■	■	
Warning lights - Red	■			■			
Additions to D-kits							
Warning lights – Green			□				
Relay box	□	□	□	□	□	□	□
Radar	□	□	□	□	□	□	□

- Standard
- Option / Available

The following options can be individually selected to add functionality to the control unit.

Functions optional	920	930	950
			

Complete kits			
Automation D-kits			□
Basic control functions			
Interlocking			□
Reduced opening			□
External control functions			
External pushb. box	□	□	□
Pull-rope switch		□	□
Remote control open/stop/close		□	□
Remote control 1-button function			□
Automatic control functions			
Automatic closing		□	□
Photocell open door			□
Safety functions			
Safety photocell (1 or 2)		□	□
French safety logic			□
Additional functions			
UPS Battery backup	□	□	□
Relay box			□

- Standard
- Option / Available



3. CEN Performance

The following tests have been carried out by the Swedish National Testing and Research Institute in Borås. For more detailed information and values, see ITT report: 0402-CDP-397301

3.1 Lifetime expectation

- 100.000 door cycles or 10 years (in a normal industrial environment)
- Springs: 20.000 door cycles

3.2 Resistance to windload

EN12424	Without passdoor	With passdoor
Test result	Class 3	Class 3

Class	Pressure Pa (N/m ²)	Specification
0	-	No performance determined
1	300	
2	450	
3	700	
4	1000	
5	> 1000	Exceptional : Agreement between manufacturer and supplier

Door size 4000 x 3450 mm

3.3 Resistance to water penetration

EN12425	Without passdoor	With passdoor
Test result	Class 3	Class 3*

Class	Pressure Pa (N/m ²)	Specification
0	-	No performance determined
1	30	Waterspray for 15 minutes
2	50	Waterspray for 20 minutes
3	> 50	Exceptional : Agreement between manufacturer and supplier

* Danish Technological Institute (ref. 23413221, dated 24/09/2002)

3.4 Air permeability

EN12426	Without passdoor	With passdoor
Test result	Class 3	Class 2

Class	Air permeability dp at a pressure of 50 Pa (m ³ /m ² /h)
0	-
1	24
2	12
3	6
4	3
5	1,5
6	Exceptional : Agreement between manufacturer and supplier

3.5 Thermal transmittance

EN12428	Triple Acrylic	Double Acrylic	Single Acrylic
Thermal transmittance	1,3 W/m ² K *	3,3 W/m ² K *	4,9 W/m ² K *

* Door size 4000 x 4000 mm

3.6 Operating forces and safe openings

EN12453 & EN12604	Crushing force N	Crushing force N	Crushing force N
Opening gap mm	200 mm from lateral border right from outside	In the middle of the door opening	200 mm from lateral border left from outside
50 mm	passed	passed	passed
300 mm	passed	passed	passed

The crushing force is the force needed for the safety edge to be activated. The maximum force allowed, according to EN12453 safety in use of power operated doors is 400 N within a maximum period of time of 0.75s.




4. Building and space requirements

4.1 Building preparations

4.1.1 Installation preparations

The Crawford 242 overhead sectional door is shipped in parts and installed on-site. All necessary installation material is included. For every track type Crawford offers specific installation kits to position the door in the building facade.

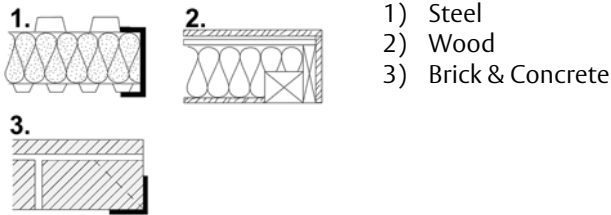

4.1.2 Electrical preparations

The manually operated door needs no electrical supply.

For an electrically operated door, the following environment criteria and electrical supplies are required for the operator to function properly:

	CDM9	CDM9 HD	CDM9 2H
Voltage supply: +/- 10%	230V AC 1-phase 50/60Hz	230V AC 1-phase 50/60Hz	230V AC 1-phase 50/60Hz
Power:	0,37 kW	0,6 kW	0,37 kW
Degree of protection:	IP55, excl. connector IP 44	IP55, excl. connector IP 44	IP55, excl. connector IP 44
Allowed door weight, max.:	400 kg	650 kg	250 kg
Temperature working range:	-20 °C to +55 °C*	-20 °C to +55 °C*	-20 °C to +55 °C*
Operating factor:	ED = 30% S3 10 min. intermittent	ED = 30% S3 10 min. intermittent	ED = 30% S3 10 min. intermittent
Mounting preparations:	-	When installing to the wall, an extra attachment angle is required	-

*) Normal opening speed in a temperature down to -8°C. In the temperature range -8 °C to -20 °C the opening speed is reduced during the first cycle to prolong the operator's lifetime. An optional heating element is available for a working range down to -30 °C

4.2 Space requirements

DLH	= Daylight Height	The height of the clear opening
DLW	= Daylight Width	The width of the clear opening
D	= Depth	The space between the inner side of the wall and the end of the horizontal track construction
h	= Excess height	The extra space required above the daylight height.
SL	= Side space Left	The space required for tracks beside the daylight width.
SR	= Side space Right	The space required for tracks beside the daylight width.


The grey marked area in the illustrations shows the free space required by door movement. Extra space requirements for electrically operated doors are stated in the operator specifications. Extra space requirements for passdoors are stated in the passdoor specifications.

4.2.1 Space requirements SL

DLW	≤ 7250 mm
DLH	≤ 6050 mm
h	485 mm (if DLH ≤ 4500 mm) 510 mm (if DLH > 4500 mm)
SL/SR*	100 mm
D	DLH + 600 mm

* In case of an electrically operated door, SL or SR = 130 mm on side of safety pull.

Side and top view

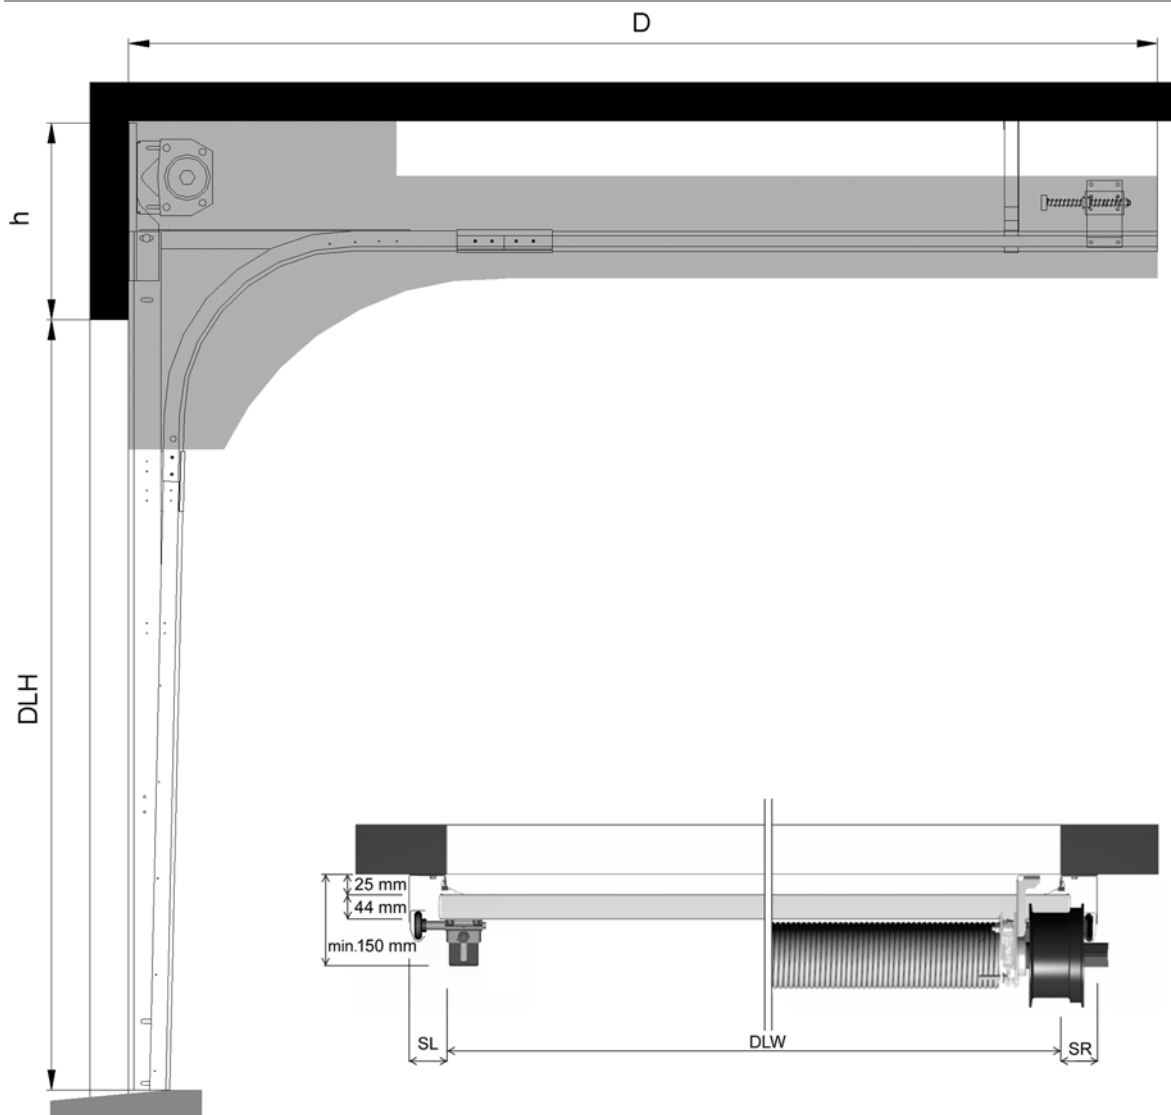




4.2.2 Space requirements SLL

DLW	≤ 5500 mm
DLH	≤ 4250 mm
h	400 mm
SL/SR*	100 mm
D	DLH + 900 mm

* In case of an electrically operated door, SL or SR = 130 mm on side of safety pull.

Side view

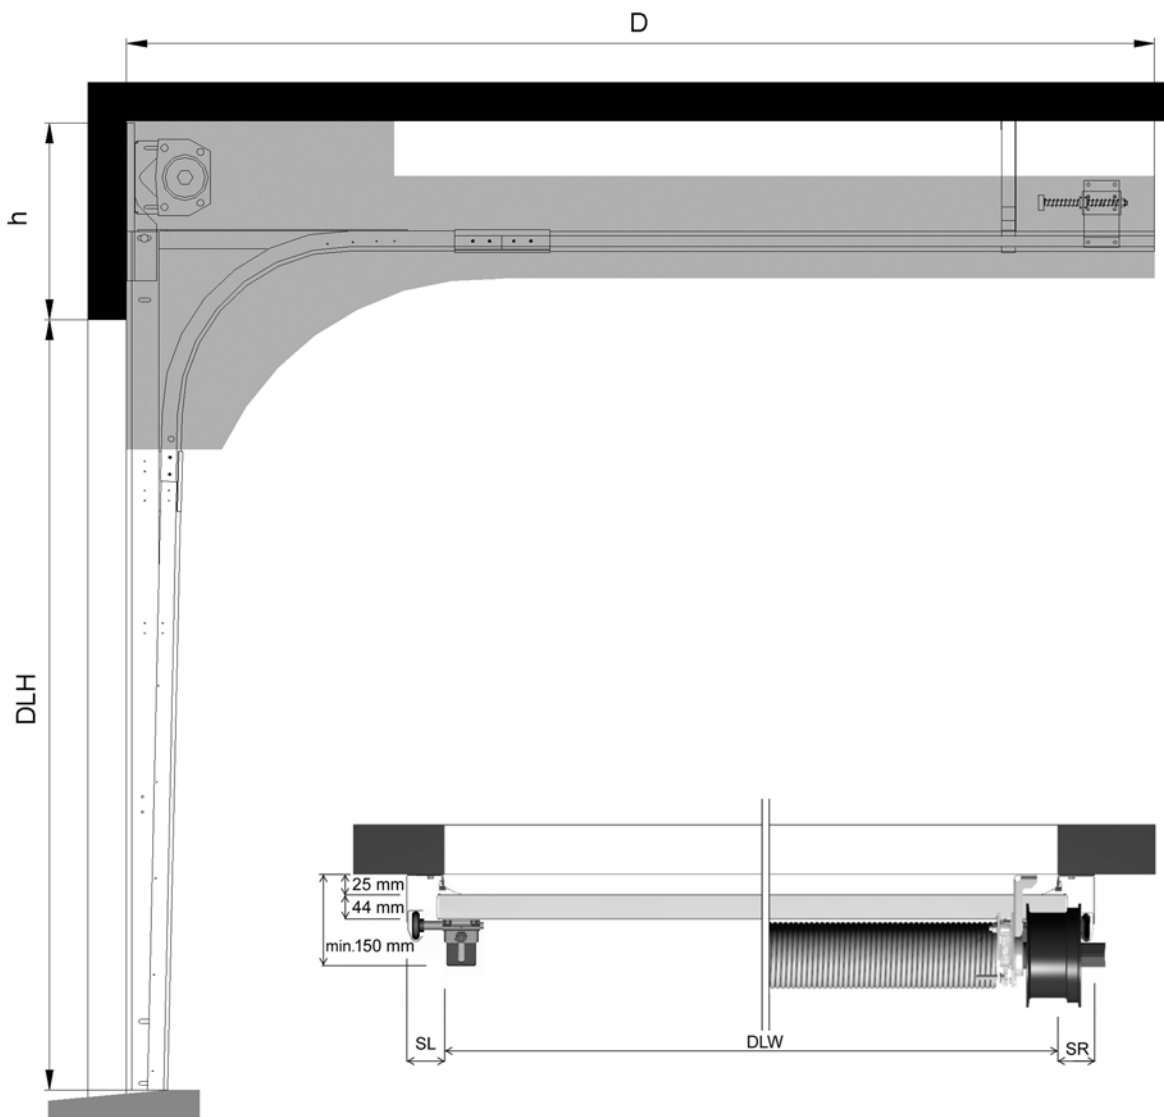


Top view

4.2.3 Space requirements HL

DLW	≤ 7250 mm
DLH	≤ 6050 mm
h	HL+320 mm (if HL ≤ 3400 mm) HL+370 mm (if HL > 3400 mm)
SL/SR*	100 mm
D	DLH - HL + 800 mm

* In case of an electrically operated door with safety pull, SL or SR = 130 mm on side of safety pull.

Side and top view

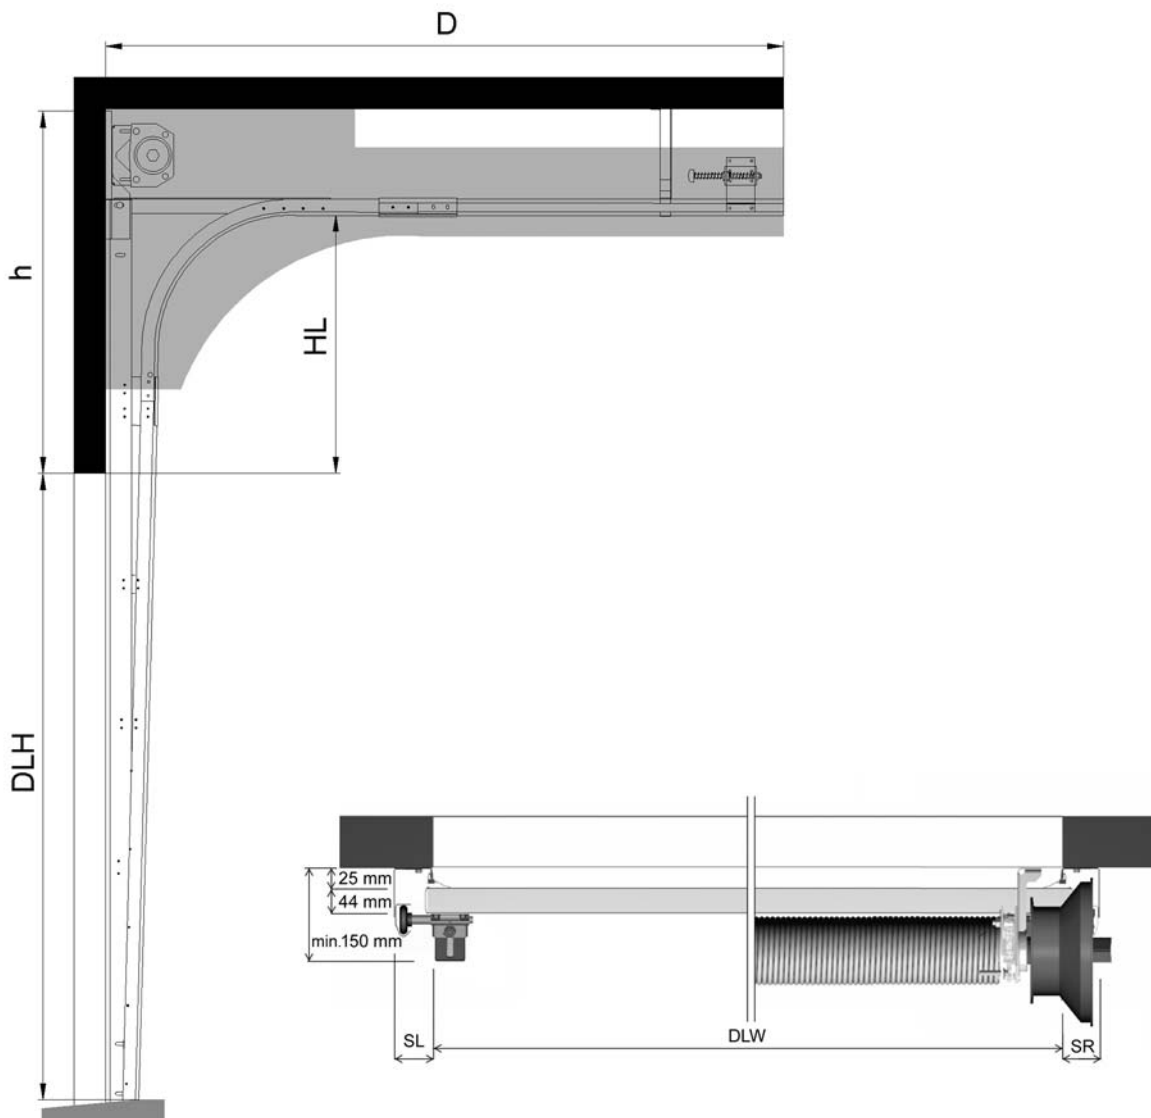




4.2.4 Space requirements LL

DLW	≤ 7250 mm
DLH	≤ 6050 mm
h*	265 mm (if ≤ 250 kg) 300 mm (if > 250 kg or passdoor or if DLW > 6000 mm)
SL/SR	100 mm
D	DLH + 1100 mm

*If the door weight exceeds 250 kg and/or if passdoor is installed: h=300 mm.

Side and top view

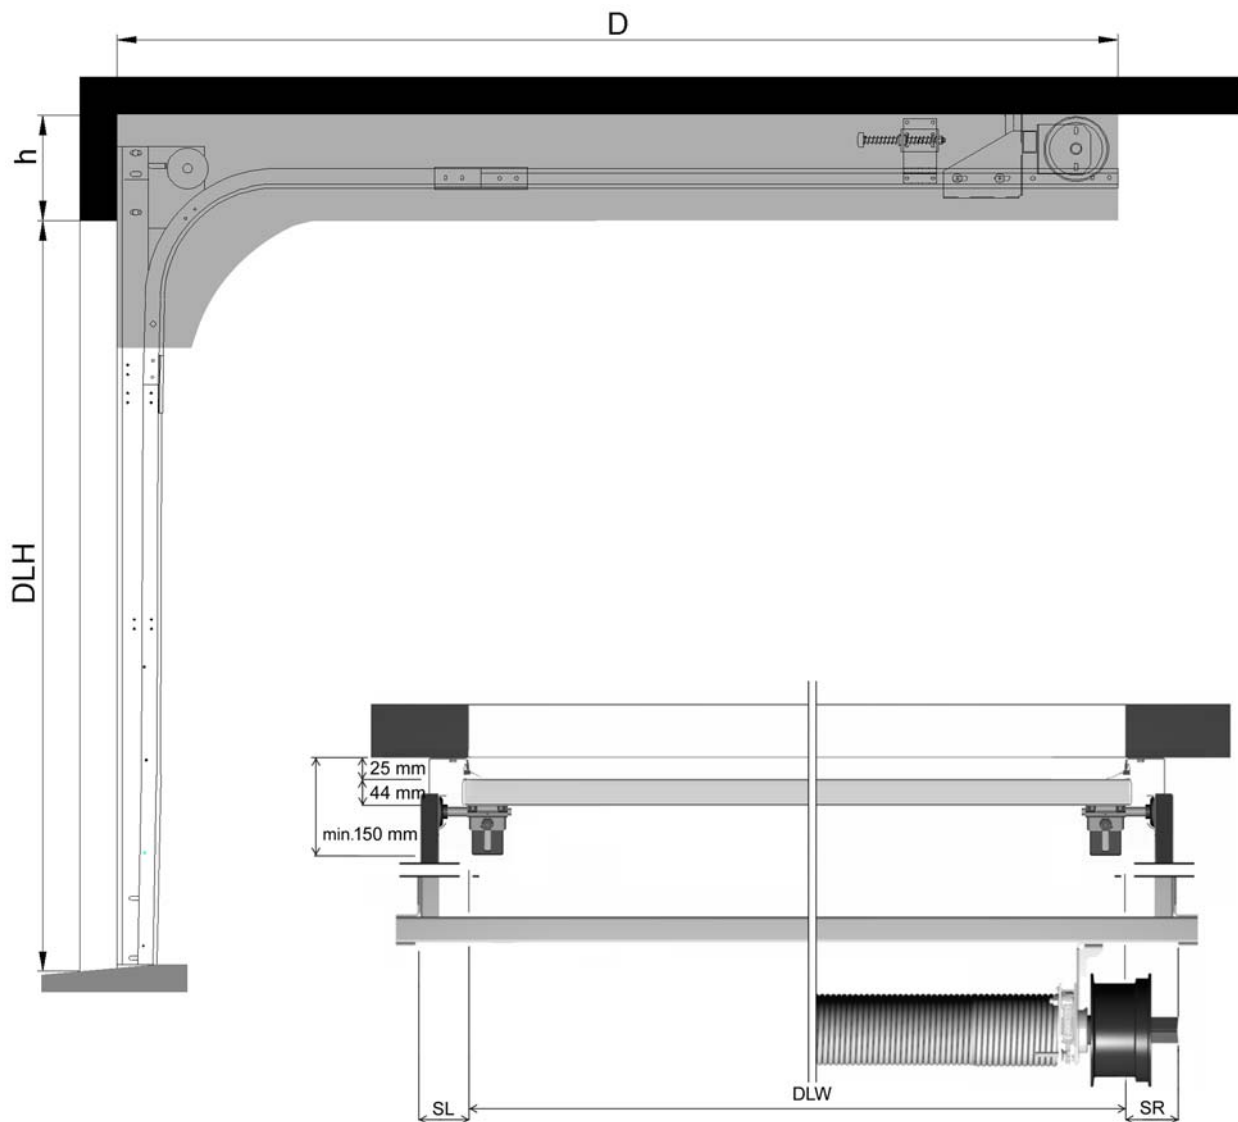

4.2.5 Space requirements VL


DLW *	≤ 7250 mm
DLH	≤ 6050 mm
h	DLH + 400 mm
SL/SR	100 mm
D	if VLA = 450 mm if VLT = 525 mm

* For VL doors: DLW ≤ 3000 mm and DLH ≤ 3350 = VLA = no beam installed

For VL doors: DLW > 3000 mm or DLH > 3350 = VLT = installed beam to support the balancing system

The following doors must be installed on a frame, equipped with an A-65 top seal.

- Doors DLW > 6000 mm
- Doors DLW > 4000 mm with a dark outside colour, installed facing south.

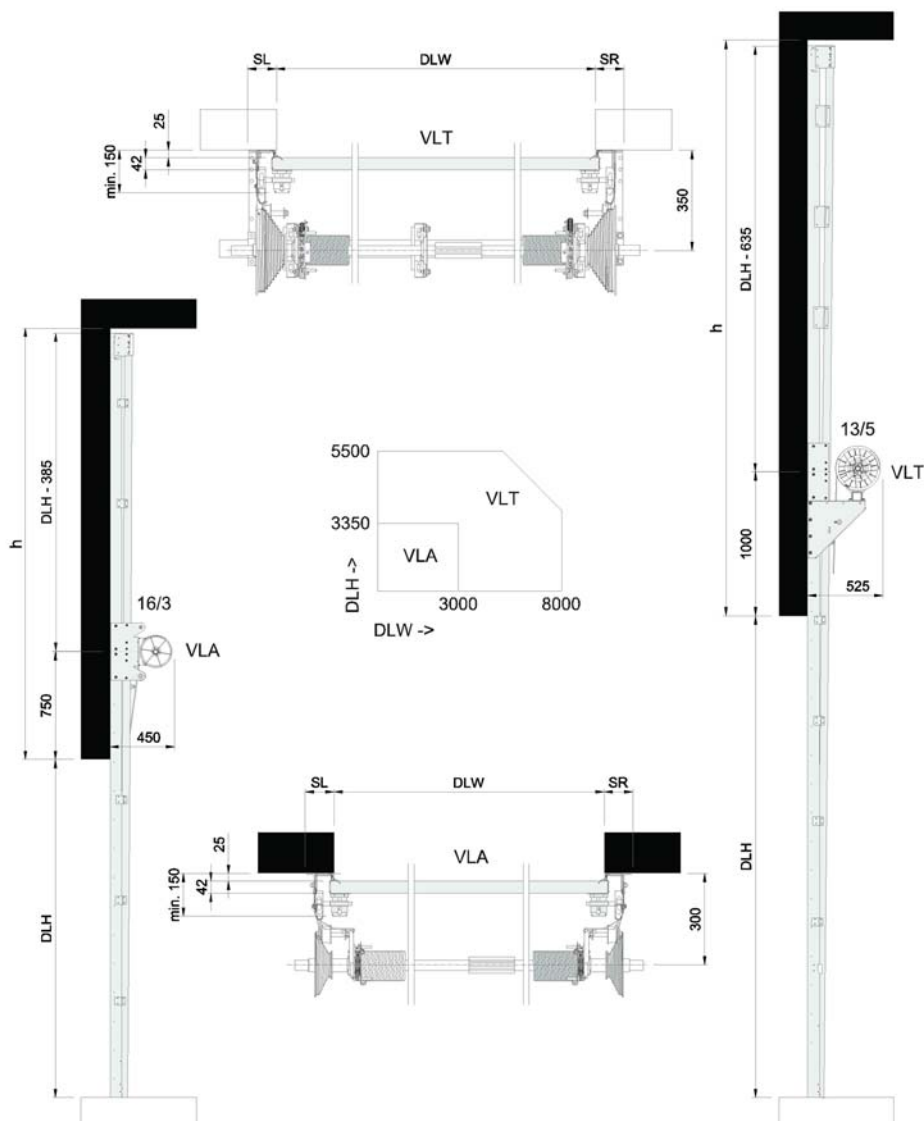





4.2.6 Space requirements Door operators

4.2.6.1 Chain hoist Space requirements

Location	Extra space requirements (mm).		
	D-hoist	T-hoist	U-hoist
Left/right	100	100	200

4.2.6.2 CDM9 (HD / 2H) Installation locations

Location of CDM9 (HD / 2H) operator

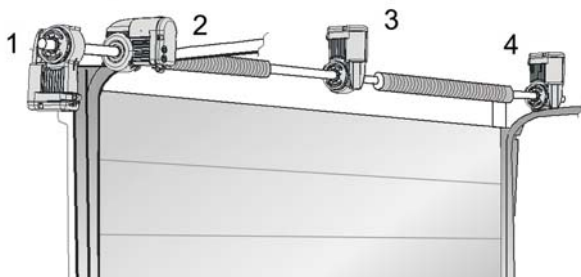

CDM9 (HD / 2H) Space requirements

Location	Extra space requirements (mm).*		
	Side room	Head room	Depth room
1 Left/right	200	0	-
2 Left/right	200	0	-
3 Centre	0	320	-
4 Left/right	200	320	-
5 Centre (Low Lift)	0	0	320

* Space required in addition to the normal space requirements.

5. Service

Preventive Maintenance Program and Modernization Services

As your entrances are part of your business flow, there's every reason to keep them working well. ASSA ABLOY Entrance Systems offers you a maintenance and modernization expertise to rely on. Our Maintenance Programs and Modernization Services are backed by a extensive expertise for all types of industrial door and docking systems, independent of brand. At your disposal is a team of dedicated expert technicians, proven through decades of maintenance, service and satisfied customers.

Preventive Maintenance Programs

Minimizing lost time, lost energy and unexpected hassle is our team's constant objective. Our service organization can support you 24/7 in maintaining all industrial door and docking systems, independent of brand. If you want to be one step ahead of break-downs, explore our portfolio of Pro-Active Care plans. Naturally, we also offer entrance upgrades to suit your specific wishes and business needs.

Pro-Active Care - Maintenance plans to fit your business

Regular maintenance can extend the lifetime of your equipment and help prevent unexpected problems. Our technician arrives on-site equipped with the knowledge and tools to service all automatic entrances, independent of brand.

- **Pro-Active Bronze**

The base on which all Pro-Active Plans are built provides the security of knowing that your equipment is regularly inspected and certified for safety, as well as performing optimally. It includes a number of planned on-site visits depending on your needs. Any unplanned service calls required during the term of the contract (including labor, travel and parts) are billed at special Pro-Active Care prices.

- **Pro-Active Silver**

This plan provides all the benefits of Pro-Active Bronze with the added advantage of labor and travel being included for service calls during regular business hours. The only additional charge would be for any parts that may be needed throughout the term of the contract.

- **Pro-Active Gold**

This plan provides the ultimate protection for your automatic entrance investment. It includes all the benefits of Pro-Active Silver, plus replacement of any parts required during an unplanned repair or planned maintenance visit. Pro-Active Gold is an excellent way to budget your automatic door expenses annually.

- **Pro-Active Tailor-Flex**

Our most flexible maintenance and service offering. The Pro-Active Care plan is designed by you, our customer. The plan allows you to balance your maintenance expenses against your real-world budget and presents the option to add or delete a number of maintenance elements to suit your budget goals, while meeting your overall performance and safety needs.

Modernization

Your entrances are a long-term investment, from which you always want the best. Products develop over time, so do regulations and your business. Let us help you increase energy savings and meet today's standards. We provide advice and modernization kits for outdated installations, ensuring your investment meet requirements and performs optimally for many more years to come.

Re-Active Service		Pro-Active Care				
		Pro-Active Bronze	Pro-Active Silver	Pro-Active Gold	Pro-Active Tailor Flex	
		○	○	○	●	Other customized requests such as Response Time, Performance InfoPack and Advanced User Training
		○	○	●	○	Replacement of worn parts according to preventive Consumable Exchange Program
		○	○	●	○	Replacement of spare parts on breakdowns
		○	●	●	○	Travel and labor for additional call-out visits
		●	●	●	●	Preventive maintenance visits 1-4 times per year
		●	●	●	●	Travel and labor for preventive maintenance visits
		●	●	●	●	Response time and priority on call-outs <24h
		●	●	●	●	Preventive planned maintenance that meets the most demanding standards in the market
	●	●	●	●	●	Safety and quality checks according to applicable regulations and norms. Documentation of test results provided
●	●	●	●	●	●	Documentation of equipment status, assessment and service provided, all generated on site
●	●	●	●	●	●	Highly trained professional technicians with extensive knowledge, state-of-the-art tools and the right spare parts*
●	●	●	●	●	●	Dedicated Professional Customer Care Hotline
		Pro-Active Bronze	Pro-Active Silver	Pro-Active Gold	Pro-Active Tailor Flex	

● = Included as standard
○ = Available at special prices
* Well-stocked service vehicles with genuine and new spare parts



Index

Numerics

900 Door control systems	18
900 Door control systems - Selection guidelines	26
900 Door control systems - Selection guidelines for automation	27
920 Door control system	18
930 Door control system	18
950 Door control system	18

A

Access and automation	19
Additional functions	21
Air permeability	28
Automatic closing	20
Automatic control functions	20

B

Balancing system	15
Basic control functions	19
Bottom seal	8
Building and space requirements ...	30
Building preparations	30

C

Cable break device (CBD)	15
CDM9 (HD / 2H) Installation locations	36
CDM9 (HD / 2H) Space requirements	36
CDM9 Operator	17
CDM9 Operator - 900 Door control systems	17
CEN Performance	28
Chain hoist	16
Chain hoist Space requirements	36
Colors	7
Construction	7
Copyright and Disclaimer Notice	2
Cylinder lock	9

D

DAD / DSD	9
DAS / DSS	9
Daylight width and daylight height	23
Description	6
Dimensions	23
Dock management	22
Door leaf	7
Door operation	25

E

Electrical operation	17
Electrical preparations	30
External control functions	19
External push button box	19

F

Facility management	22
Features	3
Fixed sections	10

G

General	6, 13, 18
---------------	-----------

H

Handle	8
High lift	13

I

Installation preparations	30
Interlocking	19

L

Lifetime expectation	28
Lock bolt	8
Locks	8
Low lift	14

M

Magnetic loop	20
Material	7
Monitoring systems	22

N

Number of windows	24
-------------------------	----

O

Operating forces and safe openings	29
Operating system	16
Optional colors *	7
Options	6

P

Passdoor 180 mm threshold	24
Passdoor low threshold	25
Passdoor with 180 mm threshold ..	11
Passdoor with low threshold	12
Performance	3
Photocell open door	20
Pull-down rope	16
Pull-rope switch	19

R

Radar	20
Reduced opening	19
Relay box	21
Remote control	19
Resistance to water penetration	28
Resistance to windload	28

S

SA3 / SS3 / SH4	10
Safety devices	15
Safety edge	20
Safety functions	20
Safety photocells 1-channel	20
Safety photocells 2-channel	20
Saving energy	22
Seals	7
Section sizes	23
Security enhancement	22
Selection guidelines for Door operator 26	
Selection guidelines for operation type 25	
Service	37
Side seal	8
Space requirements	30
Space requirements Door operators	36
Space requirements HL	33
Space requirements LL	34
Space requirements SL	31
Space requirements SLL	32
Space requirements VL	35
Special track sets	14
Specifications	23
Spring break device (SBD)	15
Standard	6
Standard colors	7
Standard lift	13

T

TAD / TSD	10
Technical facts	3
Thermal transmittance	29
Top seal	7
Track sets	13
Traffic lights - Red & Green	21
Types of operation	16

U

UPS battery backup	21
--------------------------	----

V

Vertical cross-section	23
Vertical lift	14

W

Warning lights - Green	21
Warning lights - Red	20
Wind reinforcement truss	8
Windows	9
Windows and passdoor	24

ASSA ABLOY Entrance Systems is a leading supplier of entrance automation solutions for efficient flow of goods and people. With our worldwide presence we offer products and services dedicated to satisfying end-user needs for safe, secure, convenient and sustainable operations. ASSA ABLOY Entrance Systems is a division within ASSA ABLOY.

ASSA ABLOY

www.assaabloyentrance.com